

Preliminary

LL-134YT2A-001

DATA SHEET

QC :

ENG :


Prepared By:

Part No.	LL-134YT2A-001	Spec No.	S/N-02090624D	Page	1 of 4
----------	----------------	----------	---------------	------	--------

Features:

- ◆ 1* 3mm rectangular package
- ◆ General purpose leads
- ◆ Reliable and rugged

Package Dimensions:

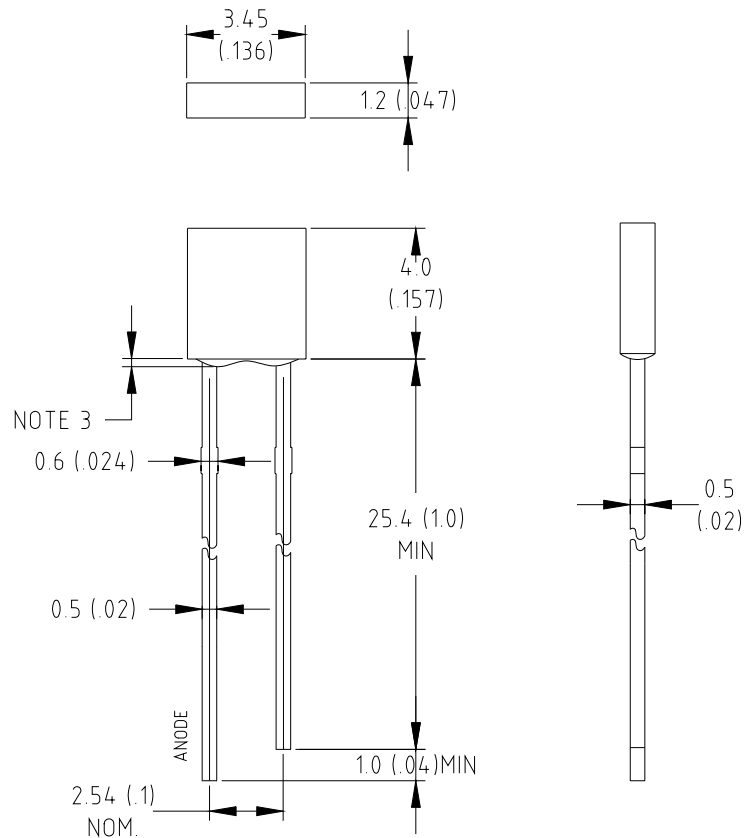

Part NO.	Chip Material.	Lens Color	Source Color
LL-134YT2A-00 1	GaAsP	Yellow Transparent	Yellow

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm(.04") max
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. This data-sheet only valid for six months.

Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	35	mA
Derating Linear From 50	0.4	mA/
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

Electrical Optical Characteristics at Ta=25


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	3	6	10	mcd	$I_f=20\text{mA}$ (Note 1)
Viewing Angle	$2_{1/2}$	145	155	165	Deg	(Note 2)
Peak Emission Wavelength	p	583	588	593	nm	$I_f=20\text{mA}$
Dominant Wavelength	d	585	590	595	nm	$I_f=20\text{mA}$ (Note 2)
Spectral Line Half-Width		30	35	40	nm	$I_f=20\text{mA}$
Forward Voltage	V_f	1.6	2.1	2.5	V	$I_f=20\text{mA}$
Reverse Current	I_R	---	---	100	μA	$V_R=5\text{V}$

Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength (d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electrical / Optical Characteristics Curves
 25 Ambient Temperature Unless Otherwise Noted)


Spectral Radiance (Peak @ 588nm)

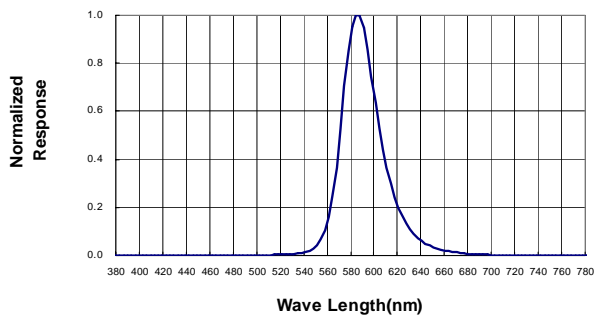

Forward Current vs Forward Voltage

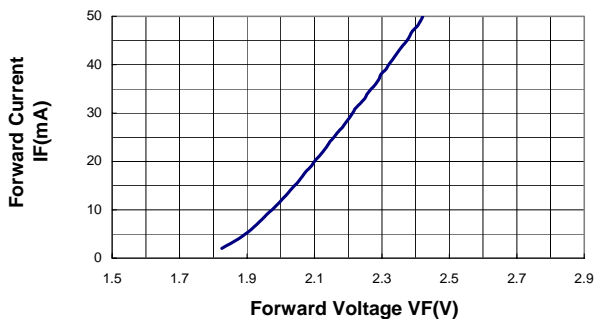

Relative Luminous Intensity vs Forward Current

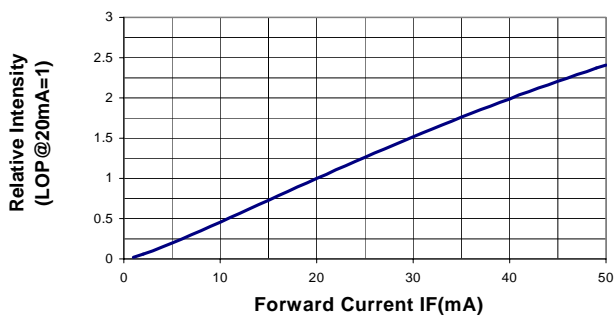

Beam Pattern

