

**LL-509VGM2E-006**

**DATA SHEET**

QC :

ENG :


Prepared By:

Part No.	LL-509VGM2E-006	Spec No.	S/N-01122819D	Page	1 of 5
----------	-----------------	----------	---------------	------	--------

## Features

- ◆ High intensity
- ◆ Standard T-1 3/4 diameter package
- ◆ Wide viewing angle
- ◆ General purpose leads
- ◆ Reliable and rugged

## Package Dimension:

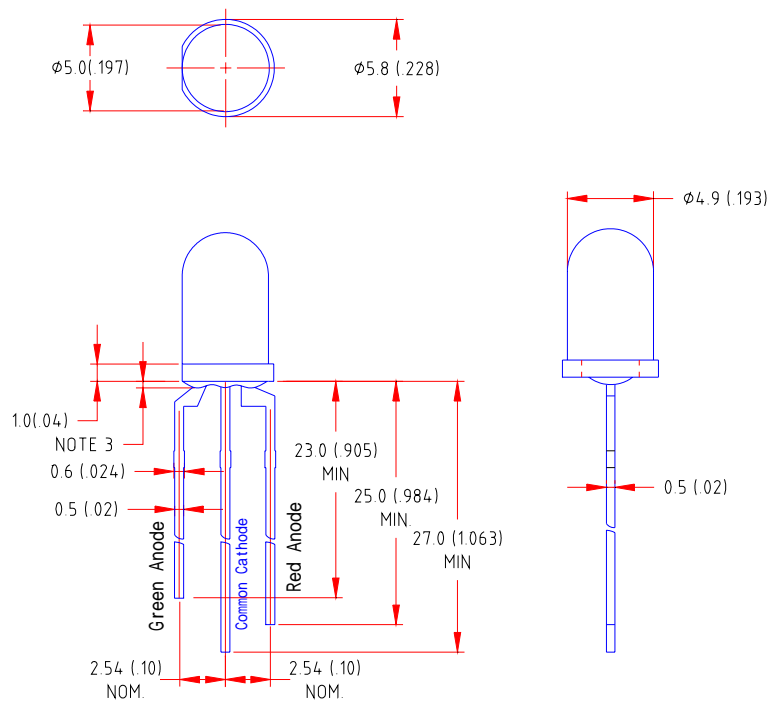

Part NO.	Chip Material		Lens Color	Source Color
LL-509VGM2E-006	Red	Green	White Diffused	Red & Green
	AlGaInP	AlGaInP		

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$  (.010") mm unless otherwise noted.
3. Protruded resin under flange is  $1.0$  mm (.04") max
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice

**Absolute Maximum Ratings at Ta=25**

Parameter	MAX.	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	35	mA
Derating Linear From 50	0.4	mA/
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

### Electrical Optical Characteristics at Ta=25


Parameter	Symbol	Emitting Color	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>	Red	120	240	500	mcd	I <sub>f</sub> =20mA Note 1
		Green	50	120	250		
Viewing Angle	2 <sub>1/2</sub>	Red	60	70	80	Deg	Note 2
		Green	60	70	80		
Peak Emission Wavelength	p	Red	627	632	637	nm	Measurement @Peak
		Green	571	576	580		
Dominant Wavelength	d	Red	615	620	625	nm	Note 3
		Green	567	574	578		
Spectral Line Half-Width		Red	15	20	25	nm	
		Green	13	18	23		
Forward Voltage	V <sub>F</sub>	Red	1.6	2.05	2.6	V	I <sub>f</sub> =20mA
		Green	1.6	2.05	2.6		
Reverse Current	I <sub>R</sub>	Red	---	---	100	μA	V <sub>R</sub> =5V
		Green					

Note:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. <sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength ( d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

**Typical Electrical / Optical Characteristics Curves**  
 (25 Ambient Temperature Unless Otherwise Noted)


**Spectral Radiance** Green Peak @ 576nm  
 Red Peak @ 632nm

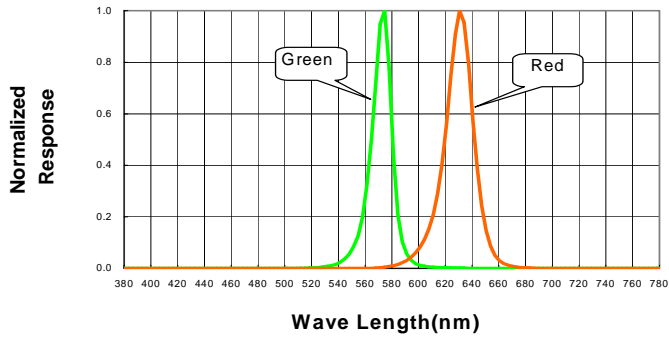

**Forward Current vs Forward Voltage**

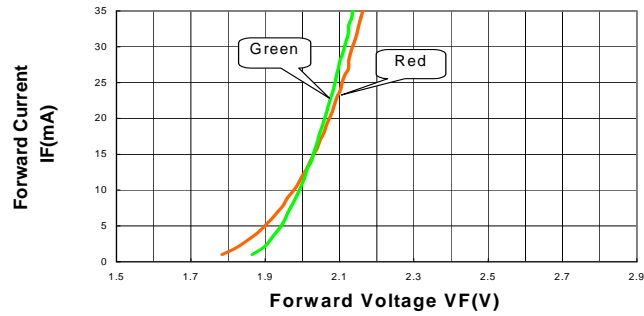

**Relative Luminous Intensity vs Forward Current**

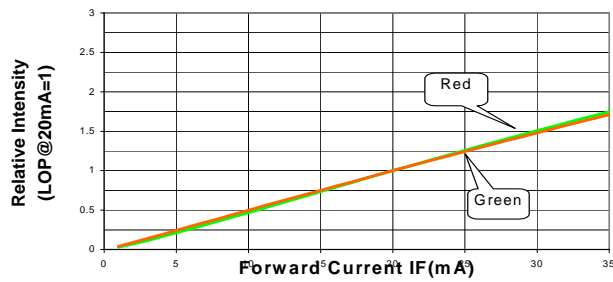

**Beam Pattern**

