

**LL-803YT1G-001**

**DATA SHEET**

CHECK BY:

MODIFIED BY: 潘冬梅


DATE: 2000/09/30

Part No.	LL-803YT1G-001	Spec No.	S/N-00093001D	Page	1 of 5
----------	----------------	----------	---------------	------	--------

## Features

- ◆ High intensity
- ◆ Diameter 8mm package
- ◆ Wide viewing angle
- ◆ General purpose leads
- ◆ Reliable and rugged

## Package Dimension:

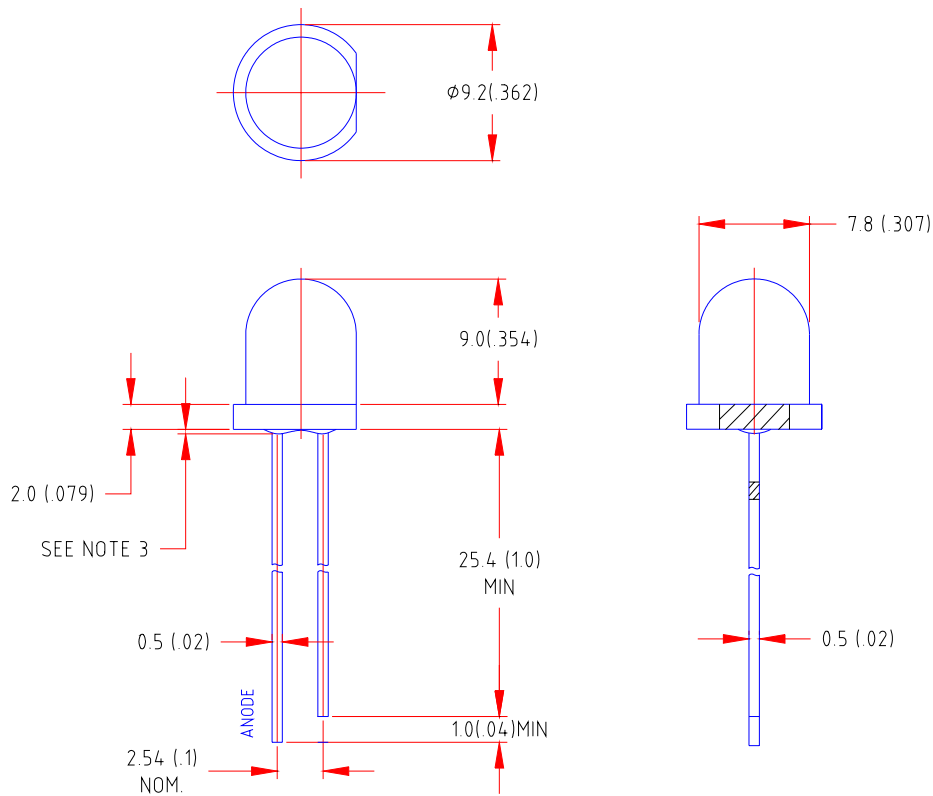

Part NO.	Lens Color	Source Color
LL-803YT1G-001	Yellow Transparent	Yellow

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25 (.010)$  mm unless otherwise noted.
3. Protruded resin under flange is  $1.0 \text{ mm } (.04)$  max
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice

**Absolute Maximum Ratings at Ta=25**

Parameter	LL-803YT1G-001	Unit
Power Dissipation	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50	0.4	mA/
Reverse Voltage	5	V
Operating Temperature Range	-40 to +80	
Storage Temperature Range	-40 to +80	
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds	

## Electrical Optical Characteristics at Ta=25


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>		1100		mcd	I <sub>f</sub> =20mA Note 1
Viewing Angle	2 <sub>1/2</sub>		24		Deg	Note 2
Peak Emission Wavelength	ρ		596		nm	I <sub>f</sub> =20mA
Dominant Wavelength	d		591		nm	I <sub>f</sub> =20mA Note 3
Spectral Line Half-Width			20		nm	I <sub>f</sub> =20mA
Forward Voltage	V <sub>F</sub>		2.05	2.50	V	I <sub>f</sub> =20mA
Reverse Current	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V

### Note:


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. <sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength, d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

**Typical Electrical / Optical Characteristics Curves**  
 (25 Ambient Temperature Unless Otherwise Noted)

**Spectral Radiance Peak @ 596nm**

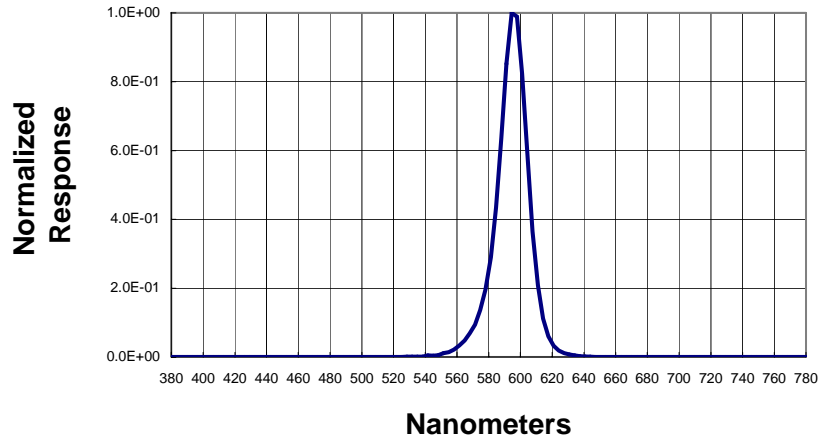

**Forward Current vs Forward Voltage**

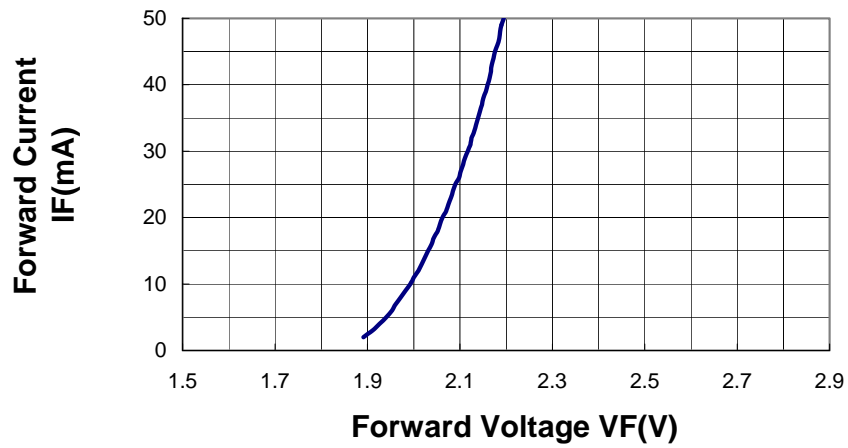

**Relative Luminous Intensity vs Forward Current**

