

# Preliminary

LL-U47B1C-009


**DATA SHEET** 


QC: ENG: Prepared By:

Part No.	LL-U47B1C-009	Spec No.	S/N-04053102S	Page	1 <b>of</b> 4
----------	---------------	----------	---------------	------	---------------



## **Package Dimensions:**

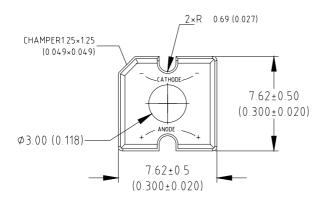

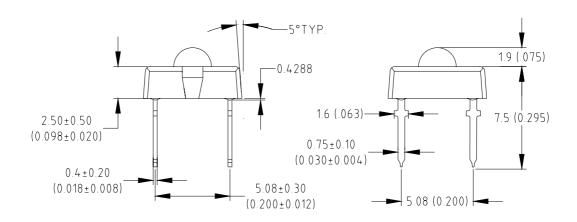

Part NO. Chip Material		Lens Color	Source Color	
LL-U47B1C-009	InGaN	Water Clear	Super Bright Blue	

#### **Notes:**

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25mm (.010") unless otherwise noted.
- 3. Protruded resin under flange is 1.0mm (.04") max.
- 4. Lead spacing is measured where the leads emerge from the package.
- 5. Specifications are subject to change without notice.
- 6. Precautions for ESD:

STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

7. This data-sheet only valid for six months.



### **Absolute Maximum Ratings at Ta=25**

Parameter	MAX.	Unit	
Power Dissipation	120	mW	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA	
Continuous Forward Current	30	mA	
Derating Linear From 50	0.4	mA/	
Reverse Voltage	5	V	
Operating Temperature Range -30 to +80			
Storage Temperature Range	-40 to +100		
Lead Soldering Temperature [4mm(.157") From Body]	260 for 5 Seconds		

### **Electrical Optical Characteristics at Ta=25**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
	2,201		7.			
Luminous Intensity	V	46	210	460	mcd	I=20mA (Note 1)
Viewing Angle	2 1/2	50	55	60	Deg	(Note 2)
Peak Emission Wavelength	р	463	468	473	nm	I f=20mA
Dominant Wavelength	d	460	470	480	nm	I <sub>f</sub> =20mA (Note 3)
Spectral Line Half-Width		20	25	30	nm	$I_f=20$ mA
Forward Voltage	V <sub>f</sub>	2.8	3.5	4.0	V	I f=20mA
Reverse Current	<b>I</b> R			100	μΑ	V <sub>R</sub> =5V


#### Notes:


- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2.  $_{_{1/2}}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity
- 3. The dominant wavelength ( d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Part No.	LL-U47B1C-009	Spec No.	S/N-04053102S	Page	3 <b>of</b> 4
----------	---------------	----------	---------------	------	---------------




# Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)




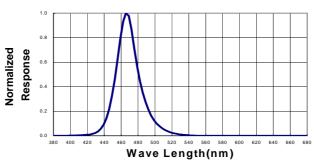


## Forward Current vs Forward Voltage

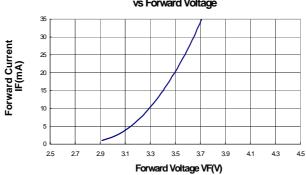

## Relative Luminous Intensity vs Forward Current

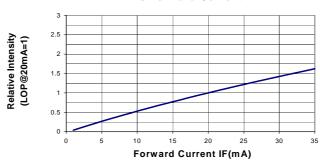



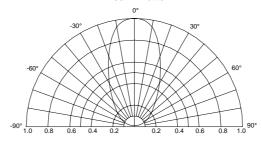

Relative Intensity (LOP@MAX=1)

Part No.	LL-U47B1C-009	Spec No.	S/N-04053102S	Page	4 <b>of</b> 4
----------	---------------	----------	---------------	------	---------------